




QUICKLOAD is a light-shielded envelope which contains a sheet of 4 x 5 in. size film. Designed for use with Polaroid's Model 545 Film Holder and a similar film holder of Kodak, it requires no darkroom loading of films. Because it is thin and light compared to conventional holders, it is very convenient when it is necessary to carry a lot of film for shooting outdoor location scenes, etc.

◆ NAMES OF PARTS

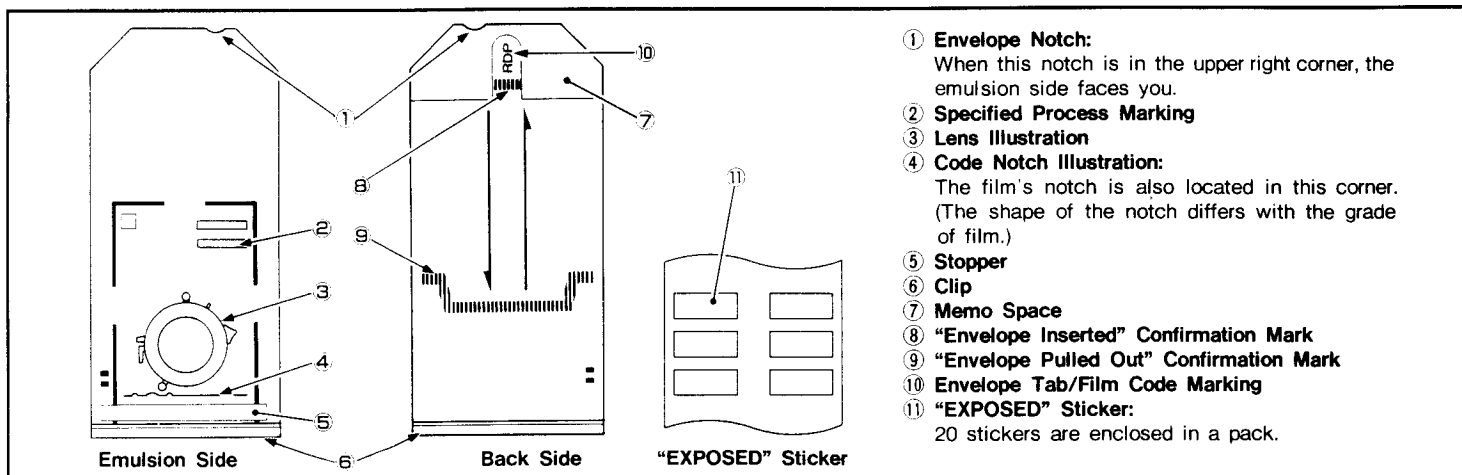

◆ OPERATING PROCEDURE WITH POLAROID'S MODEL 545 FILM HOLDER

	<p>1 Fold down the holder's control lever to the side L. Then, operate with the lever folded to the side L as follows:</p>		<p>5 SHOOT Take your picture.</p>
	<p>2 Face the emulsion side toward the lens, insert the envelope in the holder clip-side-first and push it in as far as it will go. When the clip passes through the clip catch inside the holder, you'll feel slight resistance. If it has been fully inserted, the "Envelope Inserted" Confirmation Mark (8) is no longer visible. (When holder catches the clip, you'll hear a click at the end of the holder.)</p>		<p>6 Push back the envelope into position. You'll feel slight resistance when the envelope is caught by the clip. If it has been fully inserted, the "Envelope Inserted" Confirmation Mark is no longer visible.</p>
	<p>3 Make sure the shutter is closed. Hold the Envelope Tab (10) lightly and pull out the envelope as far as it will go. When the film is set to its normal shooting position, the "Envelope Pulled Out" Confirmation Mark (9) is fully visible.</p>		<p>7 Depress the holder's release lever, hold the Envelope Tab (10) securely and pull out the envelope.</p>
	<p>4 Make sure that there is no film left in the envelope that has just been pulled out by touching the envelope with your fingers on other locations than the film area. (If there is no film in the envelope, you'll feel a difference in level in the area marked in the opposite figure. In this case, repeat the procedure from (2).)</p>		<p>8 For safety, fasten the exposed QUICKLOAD and clip with an attached "EXPOSED" sticker.</p>

◆ FILM UNLOADING (Under Total Darkness)

Film removal should be carried out under total darkness. Also, in order to avoid fingerprints use clean cotton or nylon gloves for film handling purposes.

	<p>1 After exposure remove the "EXPOSED" seal or cut it at the clip section and free the film from the envelope.</p>
	<p>2 With the envelope in one hand and the clip in the other, pull the clip section to remove the film.</p>
	<p>3 Hold the clip end film portion in one hand and the clip retained plastic sheet in the other and separate the film from the sheet.</p>
	<p>4 In the same manner separate the film from the plastic sheet on the other end of the film to completely free the film.</p>

◆ STORAGE

- Store QUICKLOAD in a cool, dry place. It should be kept in cold storage (10°C or less) before opening its package.
- An envelope removed from cold storage should be allowed to warm up to room temperature for at least 3 hours before use to avoid moisture condensation.
- Once the envelope is opened, expose the film as soon as possible. If it is necessary to return it into a refrigerator, put it in its moisture-proof bag or the like, remove air as much as possible and seal it tightly.

◆ PROCESSING

- Use the specified process described on the envelope.
- The exposed QUICKLOAD should be processed as soon as possible.
- Always take out the film in total darkness.

◆ CAUTION

- Do not seize the film area on QUICKLOAD strongly or fold it because the film may be damaged.
- When using a similar film holder of Kodak, read its instruction manual carefully before use. Before using QUICKLOAD, be sure to check beforehand if the film holder you are using with it operates properly or not.
- Remove soil and dust on the holder and keep it always clean.
- For specifications of the film, refer to the data sheet of each film.
- Take sufficient care when handling it in extremely low or high temperature.

NOTICE: If this product is found faulty due to defect in our manufacturing or packaging, it will be replaced with a new one. This is the full extent of our warranty.